


ADHESIVE-BACKED GASKET SEALS

Triple Fin Silicone Adhesive-Backed Fire Rated Gasketing

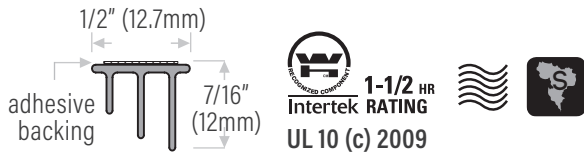

- DSS99D3** bronze colour, 1/36" (5.18m)
- DSS99D6** bronze colour, 1/72" (6.40m)
- DSS99D7** bronze colour, 1/84" (7.62m)
- DSS99D8** bronze colour, 1/96" (93.2m)
- DSS99D10** bronze colour, 1/120"
- DSS99D17** bronze colour, 1/3 ft x 2/7 ft
- DSS99D19** bronze colour, 1/3 ft x 2/8 ft
- DSS99D20** bronze colour, 1/6 ft x 2/7 ft
- DSS99D21** bronze colour, 3/7 ft
- DSS99D24** bronze colour, 3/8 ft

Application Details for DSS99

Hinge Jamb

Header

3/16" (4.7mm) minimum clearance required at head & latch

Strike Jamb

NO SCALE

Application Details for DSS11, DSS66, DS44 & DS55


Alternate positioning for hinge jamb, strike jamb & header (door must be able to operate properly).

NO SCALE

Silicone Adhesive-Backed Fire Rated Gasketing

For Wood Door & Metal Frame

This design is for those applications with very tight clearances from door edge to jamb & the pressure to close the door is critical.



- Bronze**
- DSS11D17** 17 ft. (5.18m)
 - DSS11D21** 21 ft. (6.40m)
 - DSS11D25** 25 ft. (7.62m)
 - DSS11D306** 306 ft. (93.2m)



For Hollow Metal Door & Metal Frame




- | | | |
|---|--|--|
| <p>Bronze</p> <ul style="list-style-type: none"> DSS66D17 17 ft. (5.18m) DSS66D21 21 ft. (6.40m) DSS66D25 25 ft. (7.62m) DSS66D306 306 ft. (93.2m) | | <p>White</p> <ul style="list-style-type: none"> DSS66W17 17 ft. (5.18m) DSS66W21 21 ft. (6.40m) DSS66W25 25 ft. (7.62m) DSS66W306 306 ft. (93.2m) |
|---|--|--|

Santoprene® Adhesive-Backed Fire / Smoke Rated Gasketing


Santoprene® self-adhesive, dark bronze, flexible from -80° to 150° Fahrenheit (-62° to 65° Celsius). Not affected by mildew, fungus or ultra-violet light.

For Hollow Metal Door & Metal Frame

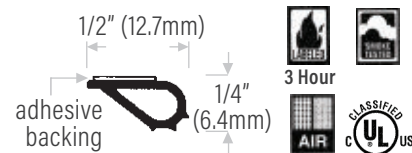

- DS44D17** bronze, 17 ft. (5.18m)
- DS44D21** bronze, 21 ft. (6.40m)
- DS44D25** bronze, 25 ft. (7.62m)
- DS44D500** bronze, 515 ft. (157m)

For Wood Door & Metal Frame

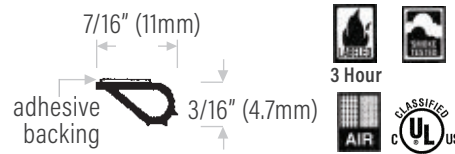

- DS55D17** bronze, 17 ft. (5.18m)
- DS55D21** bronze, 21 ft. (6.40m)
- DS55D25** bronze, 25 ft. (7.62m)
- DS55D515** bronze, 515 ft. (157m)

All adhesive gaskets have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 38° Celsius).