


WEATHERSEALING (KERF-INSERTED)

DS434 Q-Foam Wrap Kerf Inserted Jamb Weatherseal


Fire Rating Category H edge sealing system & category J gasketing for use with category B wood doors rated 20 minutes fire tested without hose stream & category B wood & plastic-covered composite doors rated up to 90 minutes.

Water Infiltration Passed water penetration tests at 25 mph (40 km/h) & 34 mph (55 km/h) ASTM E-331 standard test method.

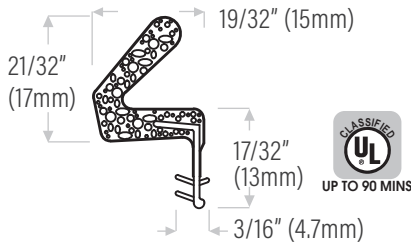

DS434BL Black. Lengths: 82" & 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.
DS434B Brown. Lengths: 37", 82" & 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.
DS434W White. Lengths: 37", 82" & 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.

E-Lon® by Foam Tite® DS421 Kerf Inserted Jamb Weatherseal



Fire and smoke ratings
UL certification for 20 minute fire rating equates to "J" rating.
UL certification to 1784 standard equates to a category "H" rating for the gasket. Having the "H" rating will allow customers to use the gasket in door assemblies that are rated for smoke and draft (an "S" rated door system).

DS421BL Black. Lengths: 37", 82", 85", 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.
DS421B Brown. Lengths: 37", 82", 85", 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.
DS421W White. Lengths: 37", 82", 85", 97".
Full coil: 500 ft. (152m) or custom size coil up to 500 ft.

Reasons to want DS421 in your door:

- AAMA 702 Class A - Extra High Performance (XHP)
- Low CLD, low water absorption, low shrinkage, low compression set
- Recyclable and sustainable, seamless skin, tear resistant skin
- Process friendly - TPE. Rigid kerf material allows for easy insertion

MULTI-PURPOSE WEATHERSEAL TAPES

Packaged Rolls



All adhesive backed tapes have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 37.77° Celsius).

Open Cell Polyurethane A/B Tapes

DS831R	3/16" thick	x 3/8" wide	x 16.5 ft. grey	(4.7mm x 9.5mm x 5.02m)
DS835R	1/4" thick	x 1/2" wide	x 16.5 ft. grey	(6.4mm x 12.7mm x 5.02m)
DS837R	3/8" thick	x 3/8" wide	x 16.5 ft. grey	(9.5mm x 9.5mm x 5.02m)

Neoprene Closed Cell Sponge A/B Tapes

DS861R	3/16" thick	x 3/8" wide	x 10 ft. black	(4.7mm x 9.5mm x 3.04m)
DS863R	1/4" thick	x 1/2" wide	x 10 ft. black	(6.4mm x 12.7mm x 3.04m)
DS864R	5/16" thick	x 3/8" wide	x 10 ft. black	(8mm x 9.5mm x 3.04m)
DS865R	5/16" thick	x 3/4" wide	x 10 ft. black	(8mm x 19mm x 3.04m)
DS866R	3/8" thick	x 3/8" wide	x 10 ft. black	(9.5mm x 9.5mm x 3.04m)
DS868R	1/2" thick	x 1" wide	x 10 ft. black	(12.7mm x 25.4mm x 3.04m)

PVC Closed Cell Soft Foam A/B Tapes

DS847R	3/8" thick	x 3/8" wide	x 16.5 ft. grey	(9.5mm x 9.5mm x 5.02m)
DS848R	3/8" thick	x 3/4" wide	x 16.5 ft. grey	(9.5mm x 19mm x 5.02m)

XI Cell/Cross-Linked Polyurethane A/B Tapes

DS852R	1/8" thick	x 3/8" wide	x 16.5 ft. white	(3.2mm x 9.5mm x 5.02m)
---------------	------------	-------------	------------------	-------------------------

Camper Truck Tape-Closed Cell Sponge Vinyl A/B Tape

DS885R	3/16" thick	x 1-1/4" wide	x 30 ft. grey	(4.7mm x 32mm x 9.14m)
---------------	-------------	---------------	---------------	------------------------


Bulk Rolls

Neoprenes (Black)

DS61-50	1/8" thick	x 3/8" wide	x 50 ft. BL	(3.2mm x 9.5mm x 15.24m)
DS67-50	1/8" thick	x 1/2" wide	x 50 ft. BL	(3.2mm x 12.7mm x 15.24m)
DS74-25	5/16" thick	x 3/4" wide	x 25 ft. BL	(8mm x 19mm x 7.6m)
DS76-12.5	1/2" thick	x 3/4" wide	x 12.5 ft. BL	(12.7mm x 19.5mm x 3.8m)
DS78-50	1/4" thick	x 1" wide	x 50 ft. BL	(6.4mm x 25.4mm x 15.24m)
DS79-12.5	1/2" thick	x 1" wide	x 12.5 ft. BL	(12.7mm x 25.4mm x 3.8m)

Backer Rod

DSROD1/4	1/4" (6.3mm)	diameter	4000 ft (1219m)	per carton
DSROD3/8	3/8" (9.5 mm)	diameter	2100 ft (640m)	per carton
DSROD1/2	1/2" (12.7 mm)	diameter	2500 ft (762m)	per carton
DSROD3/4	3/4" (19mm)	diameter	1100 ft (335m)	per carton
DSROD1	1" (25.4mm)	diameter	600 ft (182m)	per carton



Sealant backer rod is an extruded round, grey, closed-cell low-density polyethylene foam with a skin-like outer texture. It is an ideal non-absorbent, compressible, back-up material inserted into a joint to control sealant tooling. Available in footage or bulk coils.

OVERHEAD VIEW

