



# ADHESIVE-BACKED JAMB SEALS


## Vinyl-Flex (Compression) Seal, Adhesive-Backed




**DS117T84** tan, 84" (2134mm) only  
**DS117W84** white




**DS116T84** tan, 84" (2134mm) only  
**DS116W84** white

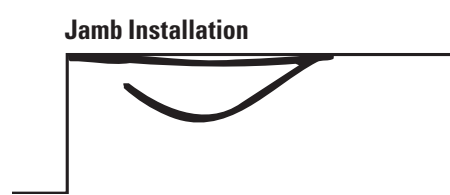

## Compression Seal, Adhesive-Backed




**DS415B96** brown, 96" (2438mm)  
**DS415B144** brown, 144" (3658mm)  
**DS415W96** white, 96" (2438mm)  
**DS415W144** white, 144" (3658mm)  
**DS415BL144** black, 144" (3658mm)

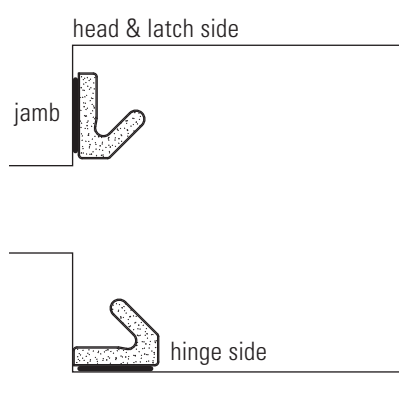

## Intumescent Seal, Adhesive-Backed (Custom order, call for manufacturing time)

1/8" (3.2mm) clearance required between doors & between door & frame. Intumescent materials are formulated to expand at 375° to 400° Fahrenheit (190° to 404° Celsius) up to 8-10 times their original thickness; completely sealing the gap (jamb & head) & between doors during a fire.

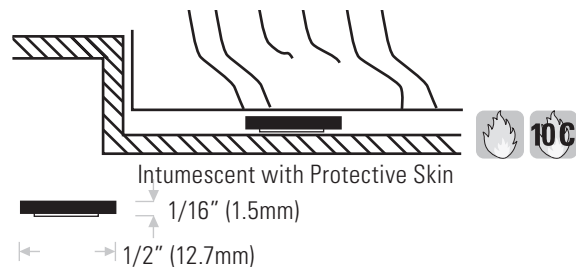

**DS200-17BL** black, 17ft roll (5.18m)  
**DS200-21BL** black, 21ft roll (6.40m)

### Application:

**ESS** 20, 45, 60, 90 Minute rated category B wood doors up to:  
 Single swing: 4'0 x 9'0 / Pairs: 8'0 x 9'0

**ESS** Meeting Edge Application up to 8'0 x 9'0 pairs of category B wood doors: 20 Minute rated with single strip installed

**ESS** 45, 60 Minute rated with two strips installed

All adhesive gaskets have a limited shelf life. These products must be used within 6 months of purchase & must be stored between 50° & 100° Fahrenheit (10° & 38° Celsius).