ASTRAGALS (OVERLAPPING)

2" (51mm)

3/16" (4.7mm)

flat bar astragal drilled & countersunk

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**

DS184SSATIN Flat bar, stainless steel
Lengths available: 84" (2134mm), 96" (2438mm), 144" (3658mm)

DSS66   door face

door edge

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**
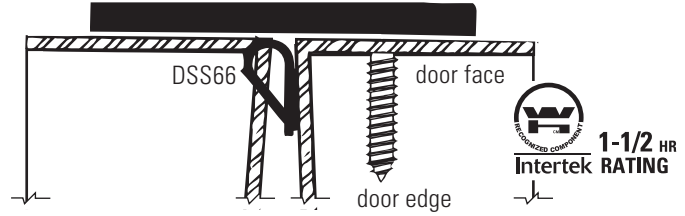
DSS66 Used in conjunction with flat bar astragal

2" (51mm)

3/16" (4.7mm)

flat bar astragal drilled & countersunk

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**
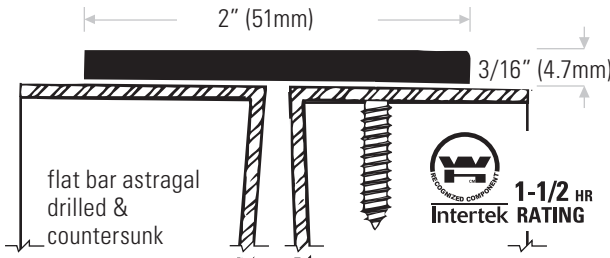
DS188-2PS Flat bar, steel prime coated 2" (51mm) wide

3" (72mm)

3/16" (4.7mm)

flat bar astragal drilled & countersunk

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**
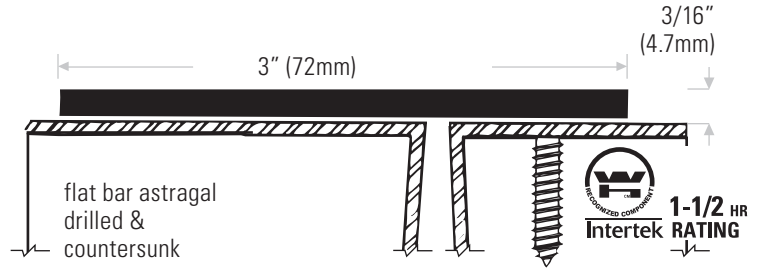
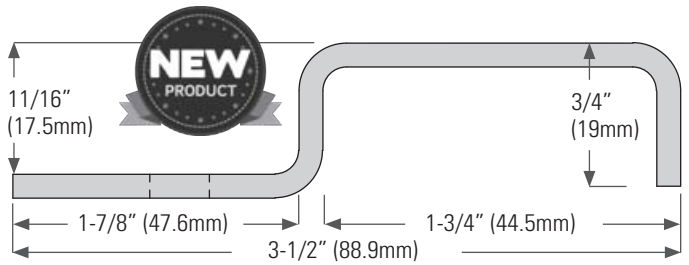**DS188-3PS** Flat bar, steel prime coated 3" (76mm) wide

All DS188 astragals: lengths available 84" (2134mm), 96" (2438mm) & 120" (3048mm)

4" (102mm)
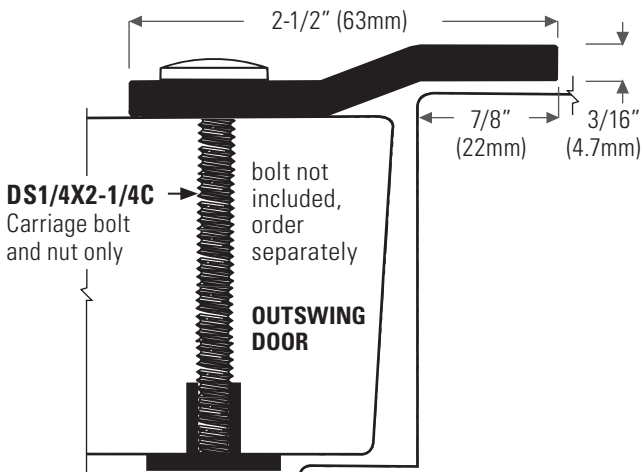
3/16" (4.7mm)

flat bar astragal drilled & countersunk

HALF SCALE

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**
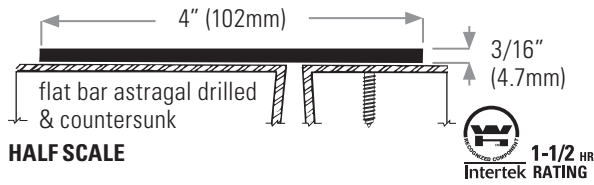
DS188-4PS Flat bar, steel prime coated 4" (102mm) wide

NEW PRODUCT

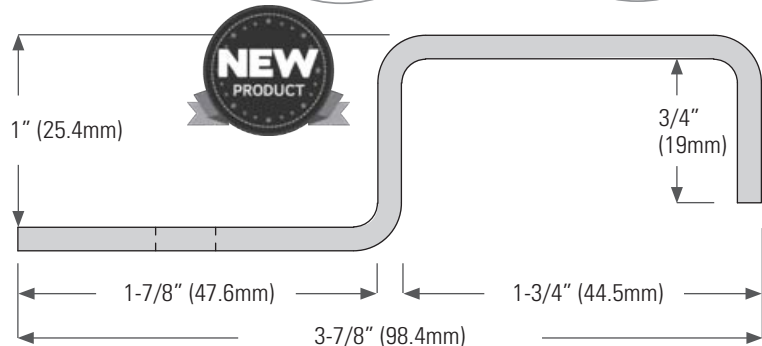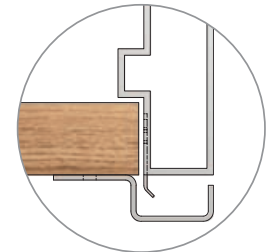11/16" (17.5mm)

3/4" (19mm)

1-7/8" (47.6mm)

1-3/4" (44.5mm)

3-1/2" (88.9mm)

DS186PS Steel prime coated, custom.
Lengths available 84" (2134mm), 96" (2438mm) & 120" (3048mm)

Security Astragals

2-1/2" (63mm)

7/8" (22mm)

3/16" (4.7mm)

DS1/4X2-1/4C
Carriage bolt and nut only

bolt not included, order separately

OUTSWING DOOR

DS179PS
Steel prime coated
DS179SS
Stainless steel satin finish. Three week delivery.

Intertek RECOGNIZED COMPONENT **1-1/2 HR RATING**

NEW PRODUCT

1" (25.4mm)

3/4" (19mm)

1-7/8" (47.6mm)

1-3/4" (44.5mm)

3-7/8" (98.4mm)

DS187PS Steel prime coated, standard.
Lengths available 84" (2134mm), 96" (2438mm) & 120" (3048mm)