



L-1900, FLDL

Fire-Rated Fusible Link Louver

PRODUCT CUT SHEET

| |
|---------------|
| PROJECT: |
| SUBMITTED BY: |
| DATE: |
| NOTES: |

For 1 3/4" Thick Doors Up To 90 Minutes


- ▶ Blades Close When Activated by Fire/Heat
- ▶ 18 Ga. Cold Rolled Steel Frame
- ▶ 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- ▶ Mitered Corners Secured with Reinforcing Clips
- ▶ Stainless Steel Spring
- ▶ 165° Fusible Link
- ▶ #8 x 3/4" Phillips Head SMS
- ▶ Free Area 40%
- ▶ Gray Primer (GPZ) Powder Coat Finish
- ▶ Available in Whole Inch Increments
Minimum Size: 10" x 6"
Maximum Size: 24" x 30"

Available Options

- ▶ Powder Coat Color Options - See Color Chart on ngp.com
 - ▶ Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
 - ▶ Torx Security Screws
 - ▶ Galvanneal - A40 Steel
 - ▶ Type 316 Stainless Steel - Specify FLDL-316SS
- | | | |
|----------------------------|-----------|-----------|
| Available Sizes: 12" x 12" | 18" x 12" | 24" x 12" |
| 12" x 18" | 18" x 18" | 24" x 18" |
| 12" x 24" | 18" x 24" | 24" x 24" |
- No Custom Sizes Available




*Up to 90 Minutes

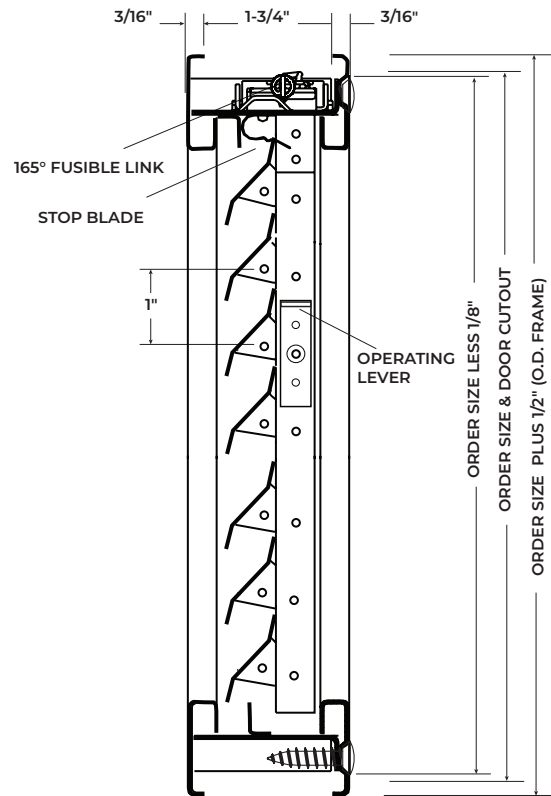

Undersized 1/8" for Clearance

Not to Scale



Top View Fusible Link Mechanism

NGP-LIT-L-1900-PCS-0924-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH