

# L-1900, FLDL

## FIRE-RATED FUSIBLE LINK LOUVER

### FOR 1 3/4" THICK DOORS UP TO 90 MINUTES




\*Up to 90 Minutes

- ▶ Blades Close When Activated By Fire/Heat
- ▶ 18 Ga. Cold Rolled Steel Frame
- ▶ 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- ▶ Mitered Corners Secured With Reinforcing Clips
- ▶ Stainless Steel Spring
- ▶ 165° Fusible Link
- ▶ #8 X 3/4" Phillips Head SMS
- ▶ Free Area 40%
- ▶ Gray Primer (GPZ) Powder Coat Finish
- ▶ Available in Whole Inch Increments:  
Minimum Size: 10" x 6"  
Maximum Size: 24" x 30"


#### Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel
- ▶ Type 316 Stainless Steel – Specify FLDL-316SS,  
Available Sizes:  
12" x 12"   18" x 12"   24" x 12"  
12" x 18"   18" x 18"   24" x 18"  
12" x 24"   18" x 24"   24" x 24"

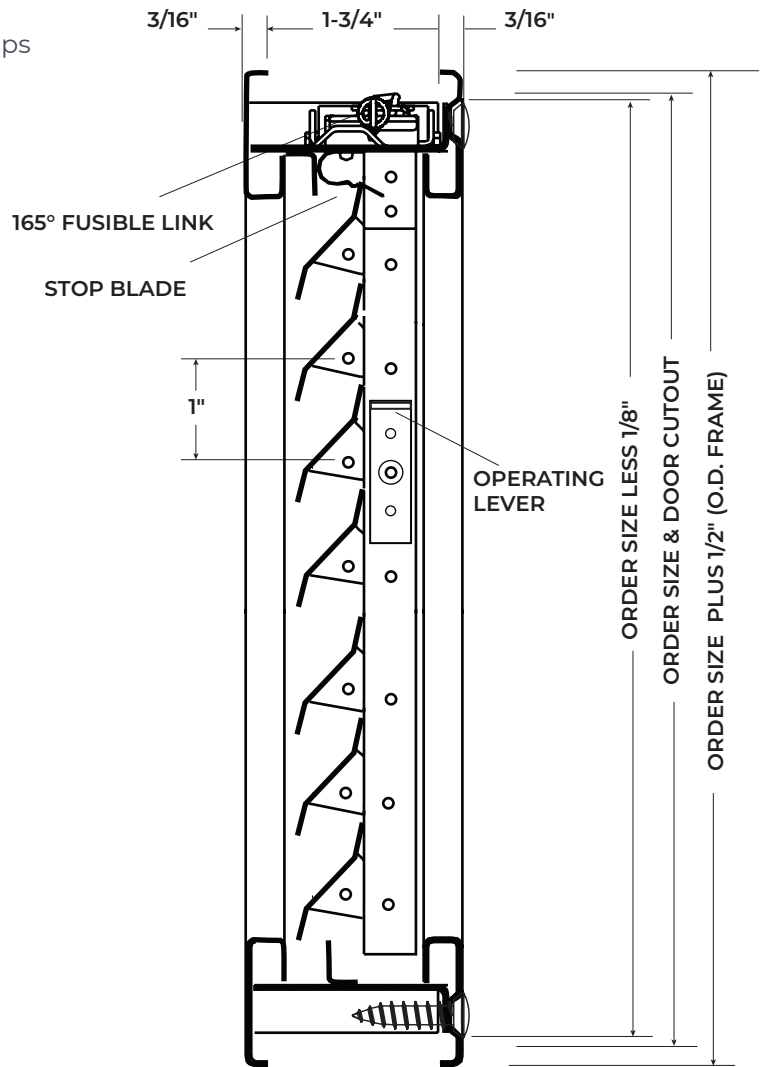

Undersized 1/8" for Clearance

Not to Scale



Top View Fusible Link Mechanism