

# L-FRA100-SP

LOW PROFILE LITE KIT



## FOR VARIABLE DOOR AND/OR GLASS THICKNESS


- ▶ 18 Ga. Cold Rolled Steel
- ▶ Mitered and Welded Corners
- ▶ Welded Reinforcing Clips at Corners
- ▶ Countersunk Mounting Screw-Holes
- ▶ #8 Phillips Head SMS
- ▶ Available in Uneven and Fractional Sizes
- ▶ Gray Primer (GPZ) Powder Coat Finish

### Required Information

- ▶ Specify Glass Thickness on Order
- ▶ Specify Door Thickness on Order if Other Than 1<sup>3</sup>/<sub>4</sub>"

### Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel
- ▶ Zinc Electroplating
- ▶ Glass & Glazing Tape - See Glass Section
- ▶ Lead Lining - 1/16" Thick

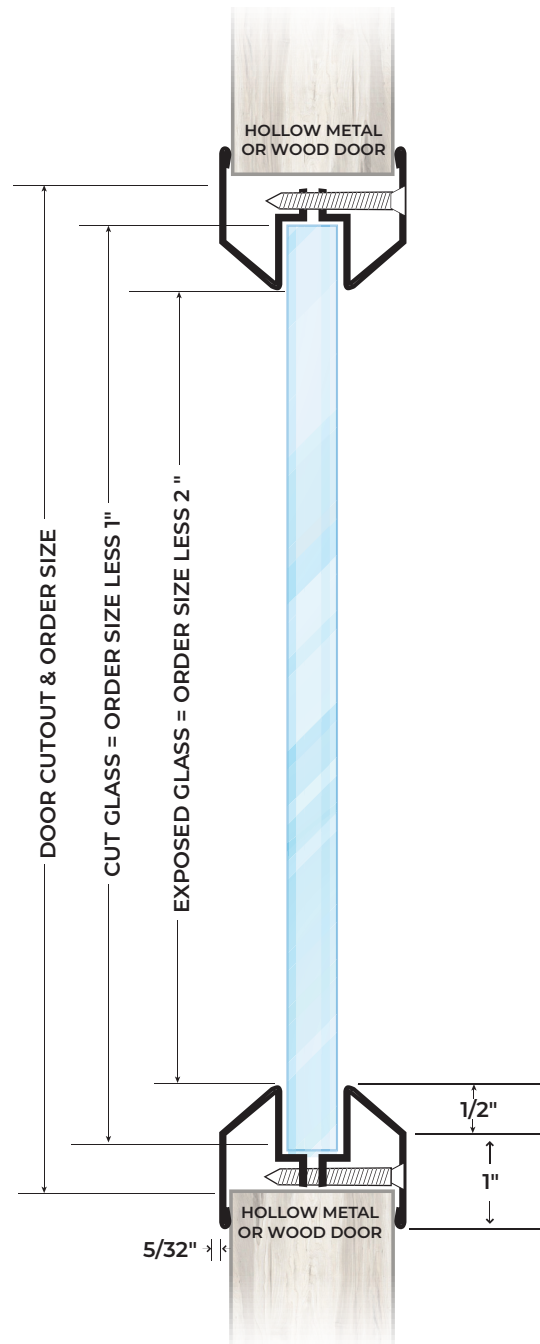

Not To Scale

Designed for Use on 1<sup>3</sup>/<sub>4</sub>" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

# L-FRA100-SP

## GLASS AND DOOR COMBINATIONS

- Details Shown are for 1 3/4" Door Thickness
- Only Configurations Shown are Available

