L-VGLF-MD, L-VGLF-MDL


L-VGLF-MD (9" x 9") L-VGLF-MDL (12" x 12")

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- ▶ For 1¾" Hollow Metal or Wood Doors
- ▶ ½" Thick High Impact Polycarbonate Plastic
- ▶ 16 Ga. Steel ¾" x ¾" Security Grille
- 18 Ga. Steel Hinged Panel
- No Exposed Fasteners on Outside of Door
- Low-Profile Frame
- ◆ 6" X 6" Exposed Glass Size on L-VGLF-MD
- 9" X 9" Exposed Glass Size on L-VGLF-MDL
- ◆ #8 X 1" Oval Head Tek Screws
- 2.8 Oz. Silicone Sealant Included
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options See Page L3
- Torx Security Screws
- Zinc Electroplating



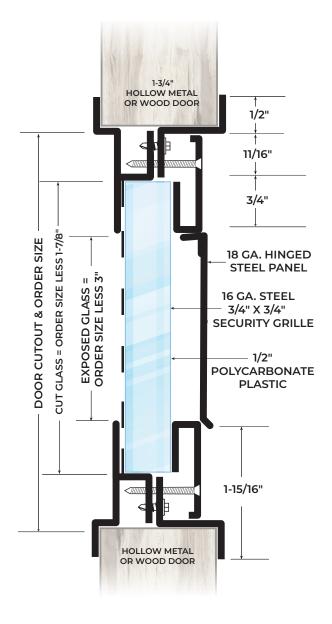

Not To Scale

Designed for Use on 13/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".